

FLUORINE-FREE FOAM PORTABLE EXTINGUISHERS




PRODUCT OVERVIEW

Positioned at the forefront of innovation, Ceasefire's Fluorine-Free Foam Extinguishers are first of its kind that are poised to redefine the standards of fire safety, offering not just a product but a game-changing approach towards safeguarding lives and the environment.

Ceasefire's Fluorine-Free technology not only ensures uncompromised fire extinguishing capability but also aligns with global environmental sustainability goals. Engineered to provide a safer and eco-friendly alternative, Ceasefire's Fluorine-Free Foam Fire Extinguishers mark a significant leap towards a greener and more responsible future in fire safety. As the industry shifts towards more environmentally conscious solutions, our Fluorine-Free Foam Extinguishers stand as a testament to Ceasefire's commitment to both effective firefighting and ecological responsibility.



ENGINEERING DRAWINGS

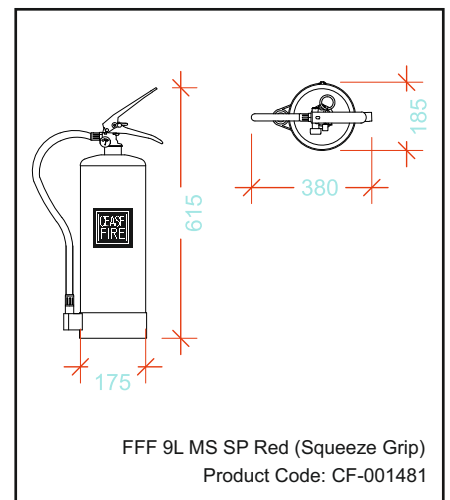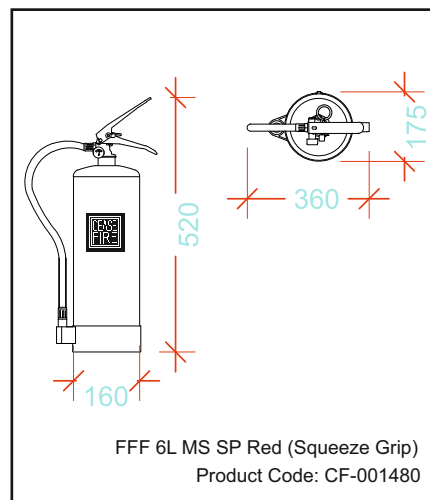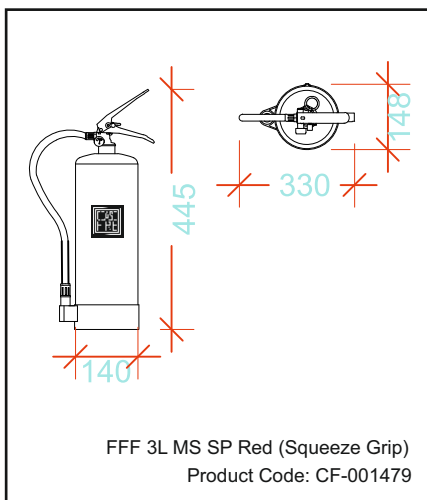



TECHNICAL SPECIFICATIONS

Product Code	UOM	CF-001479	CF-001480	CF-001481
Product Name	—	Fluorine Free Foam Fire Extinguisher 3L	Fluorine Free Foam Fire Extinguisher 6L	Fluorine Free Foam Fire Extinguisher 9L
Description	—	Fire extinguisher Fluorine Free Foam 3L MS SP Red	Fire extinguisher Fluorine Free Foam 6L MS SP Red	Fire extinguisher Fluorine Free Foam 9L MS SP Red
Capacity of Agent	L	3	6	9
Filling Tolerance	%	-5	-5	-5
Agent	—	Water + Fluorine Free Foam 6%	Water + Fluorine Free Foam 6%	Water + Fluorine Free Foam 6%
Certification Standard	—	EN3 - LPCB EN3 - KITEMARK EU-MED UKCA-MER PED UKCA	EN3 - LPCB EN3 - KITEMARK EU-MED UKCA-MER PED UKCA	EN3 - LPCB EN3 - KITEMARK EU-MED UKCA-MER PED UKCA
Diameter of Shell	MM	140	160	175
Total Height (approx.)	MM	445	520	615
MOC of Shell	—	Steel CR2 (DC01)	Steel CR2 (DC01)	Steel CR2 (DC01)
Min. Wall Thickness	MM	1.2	1.4	1.4
Test Pressure	BAR	30	30	30
Anti-Corrosive Treatment External	—	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000	Outer surfaces were EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000
Anti-Corrosive Treatment Internal	—	Plastic Lining	Plastic Lining	Plastic Lining
Service Pressure	BAR	15	15	15



Product Code	UOM	CF-001479	CF-001480	CF-001481
Type of Operating Mechanism	—	Squeeze Grip	Squeeze Grip	Squeeze Grip
Valve	—	MOC: Brass, with NRV and PRV. Construction: Forging and Machining	MOC: Brass, with NRV and PRV. Construction: Forging and Machining	MOC: Brass, with NRV and PRV. Construction: Forging and Machining
Type of Pressure Gauge	—	Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type
Type of Dis. Fitting & Length	MM	EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 300mm (min.)	EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 400mm (min.)	EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 500mm (min.)
Average Discharge Duration as per EN 3-7:2004+A1:2007, clause 71.2	SEC	9	12	12
Throw up to (approx.)	METER	5	5	6
Fire Ratings	—	8A:55B	13A:113B	21A:183B
Operating Temperature Range	°C	From +5°C to +60°C	From +5°C to +60°C	From +5°C to +60°C
Applicable to Type of Fire	—	Class A & B	Class A & B	Class A & B
Filled Weight Range*	KG	5.5	9.6	13.65
Packed Weight Range (approx)**	KG	6	10.2	15.2
Packed Size Length x Width x Height	MM	160 x 160 x 470	175 x 175 x 585	230 x 220 x 670
Product Warranty	YEAR	1	1	1

*It includes Empty Extinguisher, Contents, Plastic Base, Hose / Horn and bracket.

**It includes Empty Extinguisher, Contents, Packaging, Plastic Base, Hose / Horn and bracket.

CERTIFICATIONS



PRODUCT PICTURES



*v1' Published Date is 30-05-2026.

**Regular R&D and product improvisations may lead to change in product specifications in this data sheet, without any prior notice.

CEASEFIRE INDUSTRIES PRIVATE LIMITED

Call us at: +91-11-41846800

www.ceasefireworld.com