




# LAUNCHER BASED FIRE EXTINGUISHERS

## PRODUCT OVERVIEW

No matter how state-of-the-art the firefighting equipment on the premises is, your intent is not on putting out the flames, but instead on putting enough distance between you and the danger. While preventive measures are a necessity in any establishment, ensuring you have fire fighting technology that can be initiated and continue to fight the fire even after the people on the scene have rushed to safety is what's essential. An extinguisher that can also automatically actuate when no one is around. Presenting Launcher - The world's first extinguisher that works on auto-pilot and more.



## ENGINEERING DRAWINGS

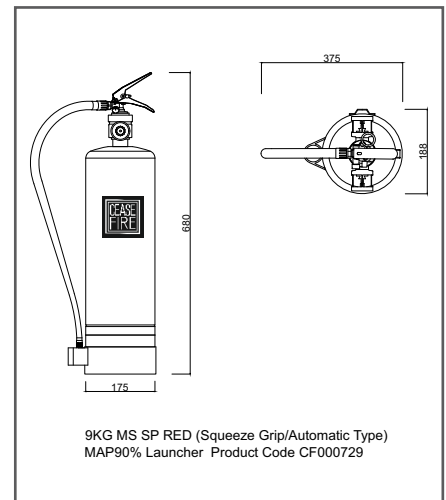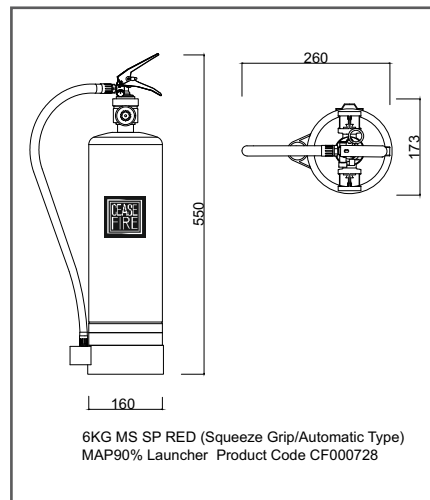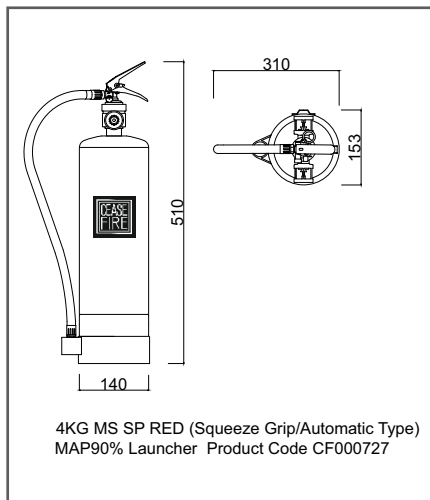

## TECHNICAL SPECIFICATIONS

| Product Code             | UOM | CF-000727                                      | CF-000728                                      | CF-000729                                      |
|--------------------------|-----|--|--|--|
| <b>Description</b>       | —   | Automatic Fire Ext Launcher<br>MAP90 4KG MS SP | Automatic Fire Ext Launcher<br>MAP90 6KG MS SP | Automatic Fire Ext Launcher<br>MAP90 9KG MS SP |
| <b>Capacity of Agent</b> | KG  | 4 ± 2%   | 6 ± 2%   | 9 ± 2%   |
| <b>Certification</b>     | —   | PED<br>UKCA-PED<br>BSI TESTED                  | PED<br>UKCA-PED<br>BSI TESTED                  | PED<br>UKCA-PED<br>BSI TESTED                  |



| Product Code                  | UOM   | CF-000727  | CF-000728  | CF-000729  |
|-------------------------------|-------|--|--|--|
| Diameter of Shell             | MM    | 140  | 160  | 175  |
| Total Height (approx.)        | MM    | 505  | 545  | 675  |
| MOC of Shell                  | —     | Steel Cr2 (DC01)   | Steel Cr2 (DC01)   | Steel Cr2 (DC01)   |
| Min. Wall Thickness           | MM    | 1.6  | 1.6  | 2.0  |
| Test Pressure                 | BAR   | 35   | 35   | 35   |
| Anti-Corrosive Treatment      | —     | Outer surfaces are EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000 | Outer surfaces are EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000 | Outer surfaces are EP Powder coated having Thickness 50 Micron Min. RAL Shade 3000 |
| Service Pressure              | BAR   | 15   | 15   | 15   |
| Type of Operating Mechanism   | —     | Squeeze Grip / Automatic   | Squeeze Grip / Automatic   | Squeeze Grip / Automatic   |
| Type of Pressure Gauge        | —     | Magnetic Bourdon Tube Type   | Magnetic Bourdon Tube Type   | Magnetic Bourdon Tube Type   |
| Type of Dis. Fitting & Length | MM    | EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 400mm (Min.)              | EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 400mm (Min.)              | EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 650mm (Min.)              |
| Throw up to (approx.)         | Meter | 4  | 6  | 7  |
| Min. Discharge Time           | Sec.  | 13   | 15   | 23   |
| Fire Rating                   | —     | 21A   144B   | 27A   183B   | 43A   233B   |
| Operating Temperature Range   | °C    | From -30°C to +60°C  | From -30°C to +60°C  | From -30°C to +60°C  |
| Applicable to Type of Fire    | —     | A, B, C, & Electrical Started Fire   | A, B, C, & Electrical Started Fire   | A, B, C, & Electrical Started Fire   |
| Filled Weight Range*          | KG    | Approx. 8.70   | Approx. 11.5   | Approx. 16.8   |



| Product Code                        | UOM  | CF-000727       | CF-000728       | CF-000729       |
|-------------------------------------|------|-----------------|-----------------|-----------------|
| Packed Weight Range (approx)**      | KG   | 9.36            | 16.36           | 17.58           |
| Packed Size Length x Width x Height | MM   | 160 x 160 x 470 | 175 x 175 x 715 | 190 x 195 x 650 |
| Product Warranty                    | YEAR | 5               | 5               | 5               |

\*It includes Empty Extinguisher, Contents, Plastic Base, Hose / Horn and bracket.

\*\*It includes Empty Extinguisher, Packaging, Contents, Plastic Base, Hose / Horn and bracket.

## QUARTZOID BULB KEY

- 57°C / 135°F    ● 68°C / 155°F    ● 79°C / 174°F    ● 93°C / 200°F    ● 141°C / 286°F
- 182°C / 360°F    ● 227°C / 440°F

## CERTIFICATIONS



**PRODUCT PICTURES**



4kg

6kg

9kg

\*v2' Published Date is 27-04-2026.

\*\*Regular R&D and product improvisations may lead to change in product specifications in this data sheet, without any prior notice.

**CEASEFIRE INDUSTRIES UK LIMITED**

Call us at: 0-113-868-6666, 0-126-891-9999

[www.ceasefire.co.uk](http://www.ceasefire.co.uk)