




WET CHEMICAL-BASED PORTABLE EXTINGUISHERS (SPRAY MODEL)

PRODUCT OVERVIEW

Ceasefire's Wet Chemical Spray Extinguishers are a versatile and eco-friendly fire safety solution ideal for high-risk environments like commercial kitchens. Featuring a biodegradable foaming agent, these extinguishers blanket flames, cut off oxygen, cool oil below its self-ignition point, and reduce re-ignition risks. They are effective on Class A, F, and Electrically started fires, and are also suitable for use on live electrical equipment up to 1000 V from a distance of 1 meter. Easy to use and reliable, Ceasefire's extinguishers offer rapid suppression across diverse fire scenarios, making them a crucial addition to any fire safety strategy.



ENGINEERING DRAWINGS

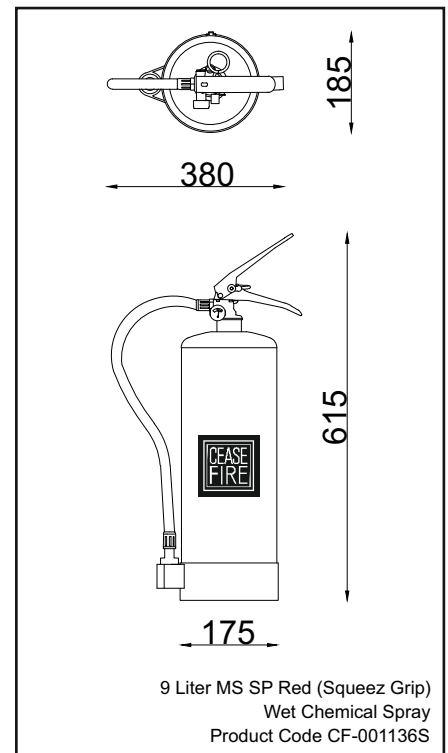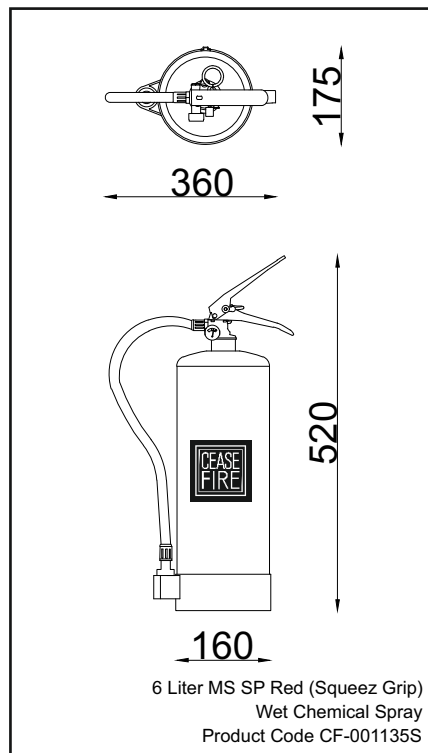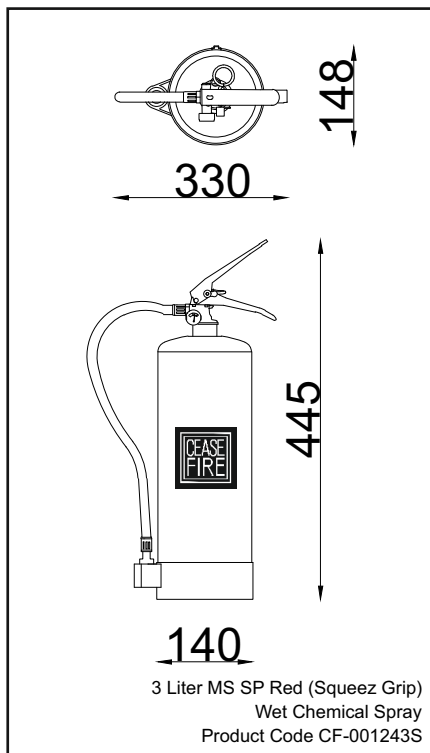



TECHNICAL SPECIFICATIONS

Product Code	UOM	CF-001243S	CF-001135S	CF-001136S
Description	—	Fire Ext Wet Chemical 3L MS SP Red (Spray model)	Fire Ext Wet Chemical 6L MS SP Red (Spray model)	Fire Ext Wet Chemical 9L MS SP Red (Spray model)
Capacity of Agent	L	3	6	9
Filling Tolerance By Volume	%	0 to +5	0 to +5	0 to +5
Agent	—	Class F Foam	Class F Foam	Class F Foam
Certification Standard	—	IS-15683 PED	IS-15683 PED	IS-15683 PED
Diameter of Shell	MM	140	160	175
Total Height (approx.)	MM	435	520	615
MOC of Shell	—	Steel Cr2(DC01)	Steel Cr2 (DC01)	Steel Cr2 (DC01)
Min. Wall Thickness	MM	1.2	1.4	1.4
Test Pressure	BAR	35	35	35
Anti-Corrosive Treatment	—	Outer surfaces were EP Powder coated having Min. Thickness 50 Micron Shade 536/538 Of IS-5	Outer surfaces were EP Powder coated having Min. Thickness 50 Micron Shade 536/538 Of IS-5	Outer surfaces were EP Powder coated having Min. Thickness 50 Micron Shade 536/538 Of IS-5
Service Pressure	BAR	15	15	15



Product Code	UOM	CF-001243S	CF-001135S	CF-001136S
Type of Operating Mechanism	—	Squeeze Grip	Squeeze Grip	Squeeze Grip
Type of Pressure Gauge		Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type	Magnetic Bourdon Tube Type
Type of Dis. Fitting & Length	MM	EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 300mm (Min.)	EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 300mm (Min.)	EPDM Rubber Braided Hose Pipe with nozzle Length of Hose 300mm (Min.)
Minimum Throw Distance (BRD as per IS-15683)	METER	> 2	> 2	> 2
Min. Discharge Time (as per IS-15683)	SEC.	9	15	15
Fire Rating	—	2A 25F	3A 75F	4A 75F
Operating Temperature Range	°C	From +5 to +60	From +5 to +60	From +5 to +60
Applicable to Type of Fire	—	A, F & Electrical Started Fire	A, F & Electrical Started Fire	A, F & Electrical Started Fire
Filled Weight Range (approx.)*	KG	6.30	11.35	16.90
Product Warranty**	YEAR	6	6	6

*It includes Empty Extinguisher, Contents, Plastic Base, Hose / Horn and bracket.

**The warranty is subject to the terms and conditions mentioned on the warranty card.

CERTIFICATIONS



PRODUCT PICTURES



*v1' Published Date is 16-08-2024.

**Regular R&D and product improvisations may lead to change in product specifications in this data sheet, without any prior notice.

CEASEFIRE INDUSTRIES PRIVATE LIMITED

Call us at: 1800 120 3473 / 9540 666 666

www.ceasefire.in